


**HOOKLOADER  
EQUIPMENT**

- DANROLL 16/62
- DANROLL 16/70
- DANROLL 20/62
- DANROLL 20/67
- DANROLL 20/70

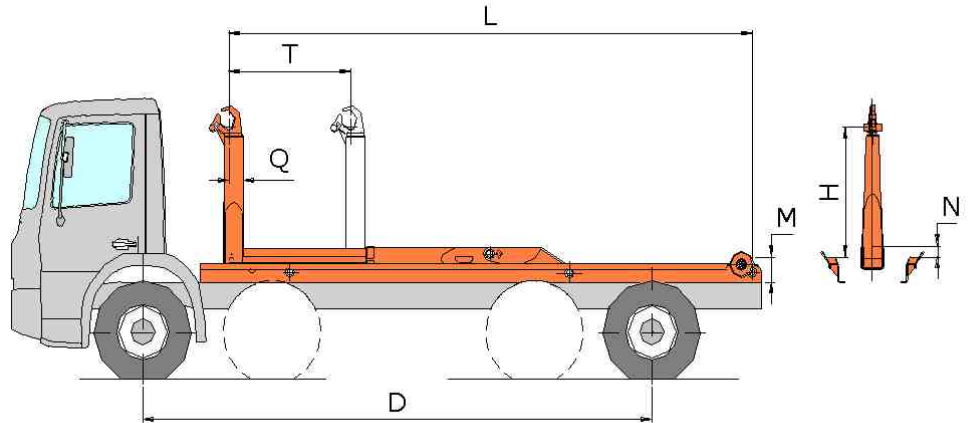

**TECHNICAL CHARACTERISTICS**

MODEL	G.V.W. (Tn)	EQUIPMENT WEIGHT (Kg)	LIFTING POWER (KG)	PUMP FLOW (cm <sup>3</sup> /rev)	WORKING PRESSURE (bar)	TIPPING ANGLE
16/62	18 to 20	1.700	16.000	60	300	51°
16/70	18 to 20	2.000	16.000	60	300	47°
20/62	20 to 26	2.020	20.000	80	300	51°
20/67	20 to 26	2.270	20.000	80	300	47°
20/70	20 to 26	2.300	20.000	80	300	47°



**DIMENSIONS**

mm.							(D)
L	H	Q	M	N	T	CONTAINER LENGTH Min/Max	DISTANCE BETWEEN AXLES (mts.)
5.215	1.400/1450	165	270	120	1.200	4.200 / 6.200	4,8 to 5,2
6.015	1.400/1450	165	270	120	1.400	4.900 / 7.000	5,8 to 6,15
5.215	1.400/1450	165	270	120	1.200	4.200 / 6.200	4,8 to 5,2
5.715	1.400/1450	165	270	120	1.100	4.900 / 6.700	5,4 to 5,8
6.015	1.400/1450	165	270	120	1.400	4.900 / 7.000	5,8 to 6,15

**VERY IMPORTANT:**

The chassis must be provided with Power Take-Off.

**DANIMA INGENIERIA AMBIENTAL, S.A.**

PARQUE EMPRESARIAL PRINCIPADO DE ASTURIAS, PARCELA 12 – 33417 AVILES (ASTURIAS) SPAIN  
 web: [www.danima.es](http://www.danima.es) mail: [danima@danima.es](mailto:danima@danima.es) tel: +34 985 514 450